



TORQUE HINGE A

15-7-3579

Provides torque stability in both directions.

For pair using: please use the same torque in both hinges.

When installing, ensure that both hinge axis are aligned.

Cycle life: 20,000 cycles.

Operating temperature: 0°C - 40°C.


For horizontal applications.

A (length)	66 mm
-------------------	-------




Note	Type 2
Material	430 stainless steel
Weight (g)	30 g
Torque	2.0 N.m N.m
B (width)	16.5 mm
C	2 mm

Finish


polished

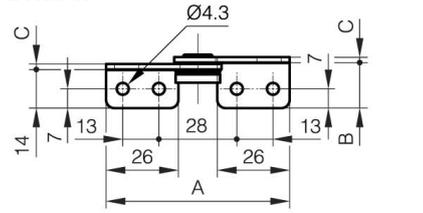





Type 2



Type 1

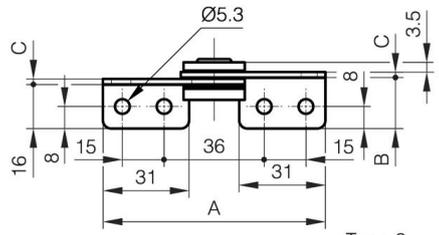

Type 2



Type 1